

Optical Isolator 1645+-5nm 5.5×35, 900um,1m FC/APC IL<1.2dB, ISO>45dB



Feature:

Low Insertion Loss

High extinction ratio

High Return Loss

Excellent environmental stability and reliability

Application:

Fiber laser

Fiber Sensor

Communication System

Test Instrumentations

Polarization maintaining optical system

Compliance


Telcordia GR-1209-CORE

Telcordia GR-1221-CORE

RoHS

1. Features:

- Low insertion loss
- High extinction ratio
- High Return Loss
- Excellent environmental stability and reliability

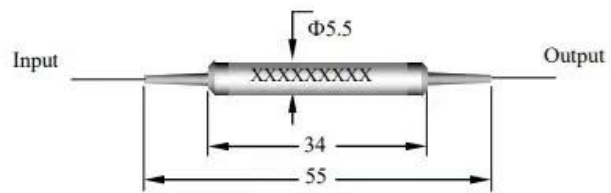

2. Applications:

- Fiber Laser
- Fiber Sensor
- Communication System
- Test Instrumentations
- Polarization maintaining optical system



3. Compliance:

- Telcordia GR-1209-CORE
- Telcordia GR-1221-CORE
- RoHS