

Collimator Variable Optical Attenuator



Applications


- Optical communication systems
- Testing instruments
- Optics laboratory
- Fiber sensors

Features

- Wide attenuation range
- High precision
- Low original loss
- Compact size

Specifications

Parameters	1310 or 1550	1310& 1550	850、1300	1053、1060、830、780、660
Bandwidth (nm)	± 40	± 40	± 40	± 15
Attenuation range (dB)	0.6 ~ 60	0.8 ~ 60	0.8 ~ 60	1.0 ~ 60
Original loss (dB)	≤ 0.6	≤ 0.8	≤ 0.8	≤ 1.0
Return loss (dB)	≥ 50		≥ 30	≥ 40
Fiber	SM28 fiber		50/125 or 62.5/125 MM fiber	Special single model fiber
Precision (dB)	0.01(for <10dB); (0.1-0.3 For >10dB)			
PDL (dB)	≤ 0.10			
Handling power	0 to 1W			
Operating temperature (°C)	-40~ +70			
Storage temperature (°C)	-40 ~ +85			

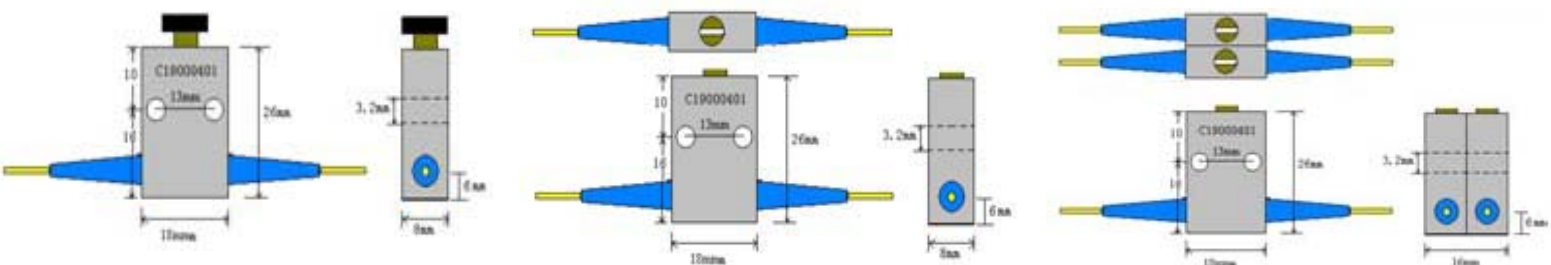

Ordering Information

VOA-C	Wavelength	Pigtail Type	Connector
	131=1310nm 155=1550nm 1315=1310&1550nm etc	1=900um 2=2mm cable 3=3mm cable	FC/UPC FC/APC etc